




LKD3588S Development Board

Datasheet

V1.0

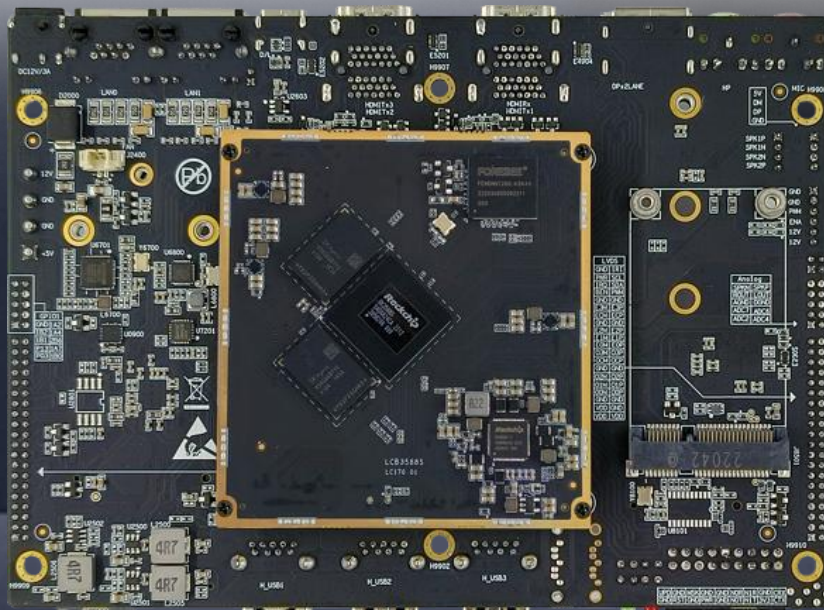

Shanghai Neardi Technology Co., Ltd.

www.neardi.com

© 2024 Shanghai Neardi Technology Co., Ltd. All rights reserved. Without written permission, no copy, photocopy, translate, or disseminate any content of this manual.

Notes: All contents only for explanatory and descriptive purposes. Please refer to the actual product. We strive to ensure consistency with the actual product. This document is provided for customers as a reference for product design and end application. It is better for you confirm the specifications and parameters carefully, provided in the document to ensure they meet the design or application requirements of the product. What's more, it is strongly recommended that customers conduct detailed tests based on our actual products in the actual application scenario to ensure they meet the final usage requirements. Neardi Technology does not assume any responsibility for any damage suffered due to the use of the document, materials, and product functions.

Due to product version upgrades or other needs, our company may update the manual. If you need the latest version of the manual, please contact our company. We always adhere to the principle of customer first and provide customers with fast and efficient support services. If you have any needs, please feel free to contact our company at any time. Contact information is as follows:

Shanghai Neardi Technology Co., Ltd.

Phone: +86 021-20952021

Website: www.neardi.com

Email: sales@neardi.com

Version History

Version	Date	Description
V1.0	2022/8/23	Initial version

Contents


- 1.Product Introduction3**
- 2.Function Overview 4**
- 3.Technical Specifications 7**
- 4.Appearance and Dimensions 9**
- 5.Interface Definition 10**
- 6.Pin Definition 12**
- 7.Application Scenarios 24**
- 8.Ordering Model 25**
- 9.About Neardi 26**

1.Product Introduction

The LKD3588S is an exquisitely designed multifunctional development and evaluation board based on the Rockchip RK3588 chip platform, consisting of our company's LCB3588S core module and baseboard. The core module is connected to the baseboard via a B2B connector and secured with four M2 screws, ensuring stability and reliability. The board is versatile, with a rich set of interfaces, compact size, and slim profile, suitable for products with limited structural space.

The LKD3588S features 3 Type-A USB 3.0 ports, 1 Type-C USB 3.1, and 1 USB 2.0 interface with a 4-pin PH2.0 connector, enabling the connection of multiple USB cameras. It also has 1 mini-PCIe slot suitable for external 4G modules. The LKD3588S supports dual-band WIFI6, BT5.0, dual 1000M Ethernet, UART, I2C, RS232, RS485, and CANBUS for a variety of common communication modules. It offers 2 HDMI outputs, 1 dual-channel LVDS output, and 1 DP interface output for diverse display options and supports multi-screen display with different content. Additionally, it can support multiple MIPI-CSI camera interfaces for input and 1 HDMI 2.0 interface for input.

The LKD3588S supports Android, buildroot, Debian, and Ubuntu systems, offering advantages such as high performance, high reliability, and high scalability, and provides users with open system source code. Users can develop and customize based on this product, and our company provides comprehensive technical support for developers and enterprise users, enabling them to efficiently complete research and development work and significantly shorten the product development and mass production cycle.

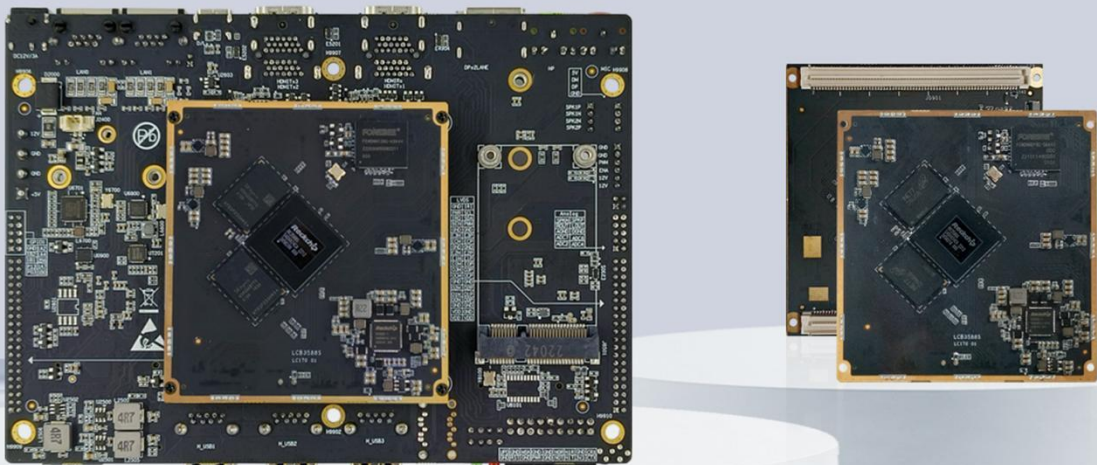

2. Function Overview



High-Performance Processor

CPU	8nm advanced process technology with an 8-core 64-bit architecture (4A76 + 4A55), offering high performance with low power consumption.
GPU	ARM Mali-G610 MC4 GPU, featuring a dedicated 2D graphics acceleration module.
NPU	6TOPS computing power for AI-related tasks.
VPU	Capable of 8K video encoding and decoding, as well as 8K display output.
DDR	LPDDR4 memory, with options for 4GB, 8GB, or 16GB capacities.
eMMC	eMMC 5.1 storage, with options for 32GB, 64GB, or 128GB capacities.



Rich Interfaces

- 2 HDMI 2.1 outputs, 1 dual 8-bit LVDS output, supporting multi-screen independent display.
- 4 MIPI CSI interfaces, supporting up to 6 MIPI camera inputs.
- 2 Gigabit Ethernet ports, dual-band WIFI 6.
- 3 Type-A USB 3.0 HOSTs, 1 Type-C USB 3.1 OTG, 1 USB 2.0 HOST with a 4-Pin PH2.0 socket.
- 3*Uart, 1*I2C, 1*CAN



Operating System

Android

Linux (Buildroot / Debian / Ubuntu)



Open Source Materials

WIKI Documentation <http://www.nearDi.com/cms/en/wiki.html>

Quick Start

Firmware Upgrade

Android Development

Linux Development

Kernel Drivers

DEMO

System Customization

Accessories

Frequently Asked Questions (FAQ)

Release Notes

Hardware Materials

Chip Datasheet

Product 2D/3D Drawings

Core Board Pin Definitions

Baseboard Reference Schematic

Baseboard Reference PCB

Key Bill of Materials (BOM)

Software Materials

Firmware Tools and Drivers

Android Source Code and Images

U-Boot and Kernel Source Code

Debian/Ubuntu/Buildroot System Files

3. Technical Specifications

Basic Parameters

SOC	RK3588S 8nm; 8-core 64-bit processor architecture (4A76 + 4A55).
GPU	ARM Mali-G610 MC4; Supports OpenGL ES 1.1/2.0/3.1/3.2; Vulkan 1.1/1.2; OpenCL 1.1/1.23/2.0; High-performance 2D image acceleration module.
NPU	6TOPS computing power / 3-core architecture; Supports int4/int8/int16/FP16/BF16/TF32.
VPU	Supports H.265/H.264/AV1/VP9/AVS2 video decoding, up to 8K60FPS; Supports H.264/H.265 video encoding, up to 8K30FPS.
DDR	LPDDR4, with options for 4GB/8GB/16GB.
eMMC	eMMC 5.1, with options for 32GB/64GB/128GB.
PMU	RK806
OS	Android / Ubuntu / Buildroot / Debian

Hardware Specifications

Power	DC12V - 3A (DC Jack 5.5*2.1mm / PH2.0 wafer connector)
USB	3*Type-A USB3.0 HOST
	1* Type-C USB3.1 OTG
	1*4Pin PH2.0 USB2.0 HOST
Display	2*Type-A HDMI 2.1 up to 8K@60fps or 4K@120fps
	Dual channel LVDS up to 1080P@60HZ


	φ3.5mm earphone Jack with L/R audio out
Audio	φ3.5mm microphone Jack with Mic in
	1*HDMI audio out
Camera	3* MIPI CSI (4 Lane) or 2*MIPI CSI (2 Lane) + 2* MIPI CSI (4 Lane)
SD card	Compatible with SDIO 3.0 protocol, system boot up supported
SIM card	Micro sim slot for Mini-PCIe 4G LTE module
RJ-45	2*10/100/1000-Mbps data transfer rates
RTC	RTC power on and off supported
Serial port	3*Uart, 1*I2C,1*CAN
Keys	3* keys (power, reset, update)
Power output	12V, 5V, 3.3V,1.8V

Other Parameters


Dimensions	Length * Width * Height (mm) 160*115*28.25
Operating Temperature	-10 ~ 70°C
Weight	Approximately 200g (excluding peripherals)

4. Appearance and Dimensions




4.1 Appearance

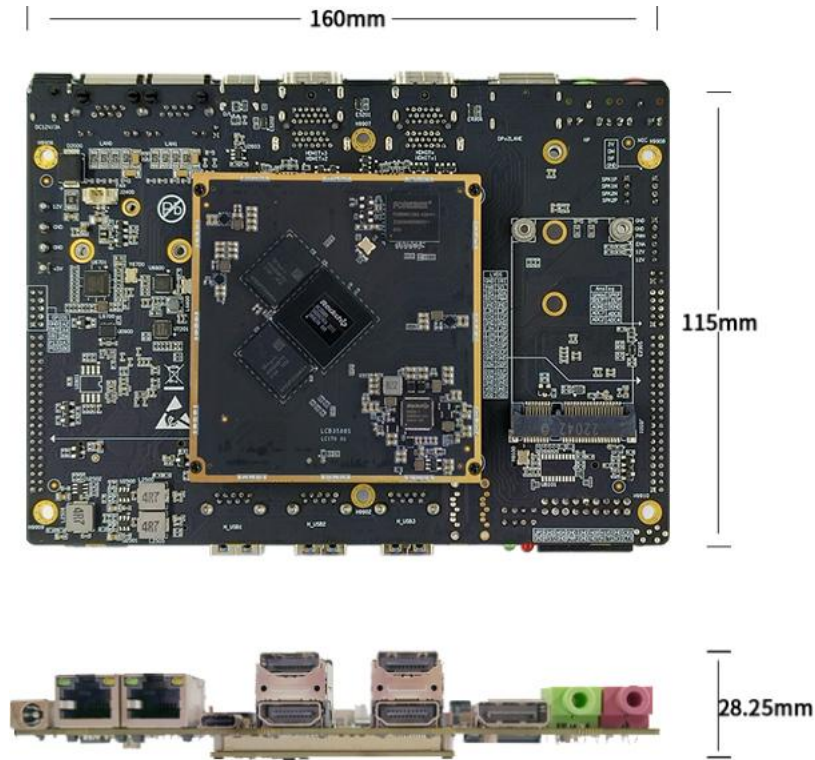

4.2 Dimensions

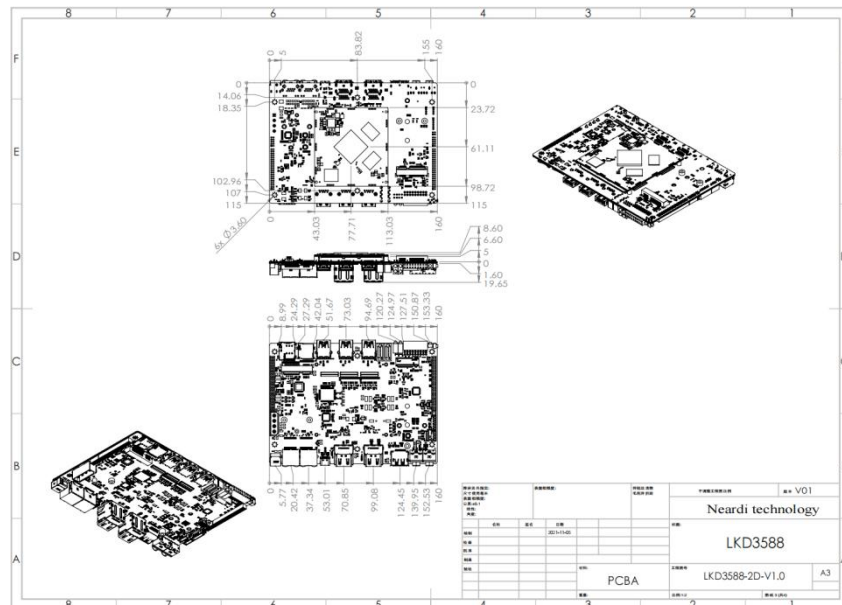

5.Interface Definition

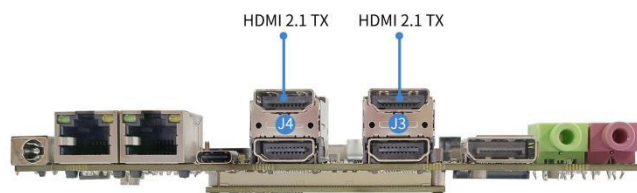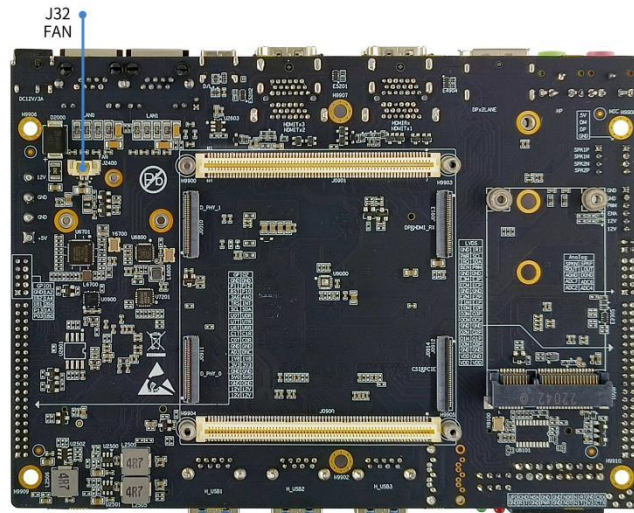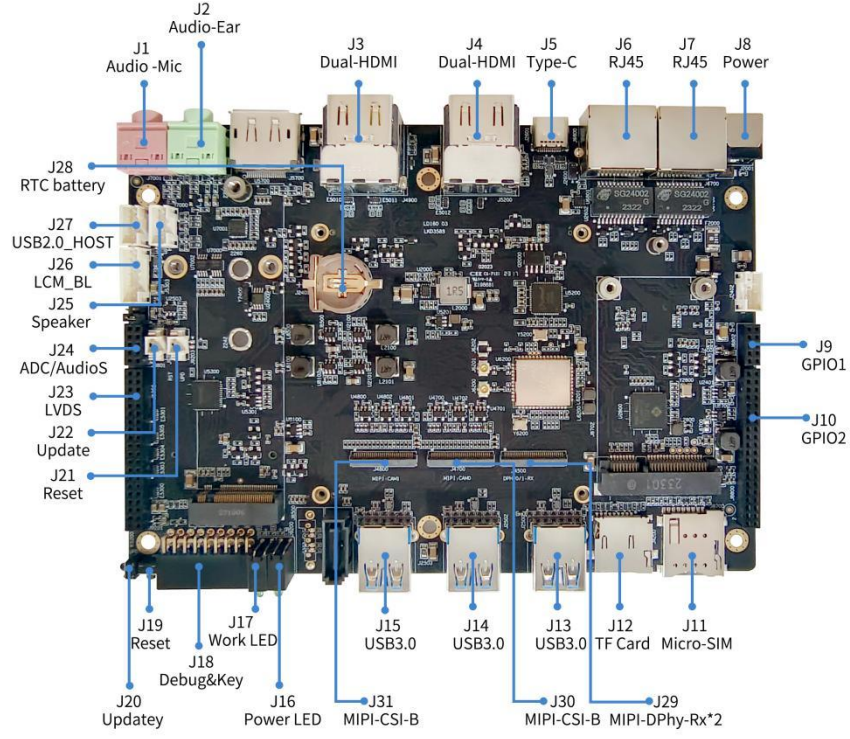

Part reference	Part Name	Part Specifications	Part Description
J1	Audio Jack-Mic	φ3.5mm 3-L Jack	Micphone In
J2	Audio Jack-Ear	φ3.5mm 3-L Jack	L/R audio out
J3	Dual-HDMI	Type-A HDMI 2in1	HDMI2.1 Tx
J4	Dual-HDMI	Type-A HDMI 2in1	HDMI2.1 Tx
J5	Type-C	Type-C Socket	Type-C with USB3.0 or Display port / Debug
J6	RJ45	Gigabit Ethernet	10/100/1000-Mbps data transfer rates
J7	RJ45	Gigabit Ethernet	10/100/1000-Mbps data transfer rates
J8	power	DC 5.5*2.1mm	Main power supply, DC12V – 3A
J9	GPIO1	PH2.0mm 2x5pin header	GPIO for external usage
J10	GPIO2	PH2.0mm 2x20pin header	GPIO and Power for external usage
J11	Micro-SIM	Push-Push Micro SIM Socket	For Micro SIM Card (1.8/3.3V)
J12	TF Card	Push-Push TF socket	TF Card
J13	USB3.0	Type-A USB3.0	USB3.0
J14	USB3.0	Type-A USB3.0	USB3.0
J15	USB3.0	Type-A USB3.0	USB3.0
J16	Power LED	Red and Green LEDs	Power status indicate
J17	Work LED	Green led *2	Work status and 3G/4G Module Status Indicator
J18	Debug&Key	PH2.54mm 2x9pin Receptacle	Debug and Key and 3.3V out
J19	Reset	push-button	Key for system reset
J20	Update	push-button	Key for system recovery or other function
J21	Reset	PH2.0mm 2pin wafer	Connector for external Reset key
J22	Update	PH2.0mm 2pin wafer	Connector for external update key
J23	LVDS	PH2.0mm 2x20pin header	Dual channel 24bit LVDS output
J24	ADC/Audio	PH2.0mm 2x5pin header	ADC In and Audio Out
J25	SPEAKER	PH2.0mm 4pin wafer	Dual channel audio Output for Speaker
J26	LCM_BL	PH2.0mm 6pin wafer	LCM backlight control
J27	USB2.0	PH2.0mm 4pin wafer	USB2.0 for external devices
J28	RTC battery	CR1220 Socket	RTC battery power input 3.0V
J29	MIPI-DPhy-Rx* 2	30pin 0.5mm pitch FPC connector	Dual MIPI 4Lane Rx
J30	MIPI-CSI-B	30pin 0.5mm pitch FPC connector	MIPI-CSI 4lane or 2*2Lane for external cameras
J31	MIPI-CSI-A	30pin 0.5mm pitch FPC connector	MIPI-CSI 4lane or 2*2Lane for external cameras
J32	FAN	PH2.0mm 2pin wafer	12V Output for FAN Power

6. Pin Definition

Audio Jack-Mic (J1)

Pin number	Pin name	Voltage level	Notice
1	GND	GND	-
2	Mic in	-	Vp-p < 0.8V
3	NC	-	-
4	NC	-	-
5	Mic in	-	Vp-p < 0.8V

Audio Jack-Earphone (J2)

Pin number	Pin name	Voltage level	Notice
1	GND	GND	-
2	EarPhone right out	-	0.5V RMS @320hm Load
3	NC	-	Not Connected
4	Detect	-	Low-Plug Out; High-Plug In
5	EarPhone right out	-	0.5V RMS @320hm Load

Dual-HDMI (J3)

Pin number	Pin name	Voltage level	Notice
U1	D2P	-	HDMI2.1 Output 0
U2	D2_GND	GND	-
U3	D2N	-	HDMI2.1 Output 0
U4	D1P	-	HDMI2.1 Output 0
U5	D1_GND	GND	-
U6	D1N	-	HDMI2.1 Output 0
U7	D0P	-	HDMI2.1 Output 0
U8	D0_GND	GND	-
U9	D0N	-	HDMI2.1 Output 0
U10	CLKP	-	HDMI2.1 Output 0
U11	CLK_GND	GND	-
U12	CLKN	-	HDMI2.1 Output 0
U13	NC	-	Not Connected
U14	AUXP	-	AUXP for eARC
U15	SCL	5V	I2C-SCL for HDMI2.1 Tx0(GPIO4_B7_u)
U16	SDA	5V	I2C-SDA for HDMI2.1Tx0(GPIO4_C0_u)
U17	GND	GND	-
U18	+5V	+5V	-
U19	AUXN	-	AUXN for eARC
D1	NC	-	-

D2	NC	-	-
D3	NC	-	-
D4	NC	-	-
D5	NC	-	-
D6	NC	-	-
D7	NC	-	-
D8	NC	-	-
D9	NC	-	-
D10	NC	-	-
D11	NC	-	-
D12	NC	-	-
, D13	NC	-	-
D14	NC	-	-
D15	NC	-	-
D16	NC	-	-
D17	NC	-	-
D18	NC	-	-
D19	NC	-	-

Dual-HDMI (J4)

Pin number	Pin name	Voltage level	Notice
U1	D2P	-	HDMI2.1 Output 1
U2	D2_GND	GND	-
U3	D2N	-	HDMI2.1 Output 1
U4	D1P	-	HDMI2.1 Output 1
U5	D1_GND	GND	-
U6	D1N	-	HDMI2.1 Output 1
U7	D0P	-	HDMI2.1 Output 1
U8	D0_GND	GND	-
U9	D0N	-	HDMI2.1 Output 1
U10	CLKP	-	HDMI2.1 Output 1
U11	CLK_GND	GND	-
U12	CLKN	-	HDMI2.1 Output 1
U13	NC	-	Not Connected
U14	AUXP	-	AUXP for eARC
U15	SCL	5V	I2C-SCL for HDMI2.1 Tx0(GPIO3_C6_u)
U16	SDA	5V	I2C-SDA for HDMI2.1Tx0(GPIO3_C5_u)
U17	GND	GND	-
U18	+5V	+5V	-
U19	AUXN	-	AUXN for eARC
D1	NC	-	-

D2	NC	-	-
D3	NC	-	-
D4	NC	-	-
D5	NC	-	-
D6	NC	-	-
D7	NC	-	-
D8	NC	-	-
D9	NC	-	-
D10	NC	-	-
D11	NC	-	-
D12	NC	-	-
D13	NC	-	-
D14	NC	-	-
D15	NC	-	-
D16	NC	-	-
D17	NC	-	-
D18	NC	-	-
D19	NC	-	-

Type-C (J5)

Pin number	Pin name	Voltage level	Notice
A1	GND	GND	-
A2	TYPEC0TX1P	-	-
A3	TYPEC0TX1N	-	-
A4	VBUS5V0_TYPEC	+5V	-
A5	TYPEC0_CC1	-	-
A6	TYPEC0_OTGDP	-	-
A7	TYPEC0_OTGDM	-	-
A8	TYPEC0_AUXP	-	-
A9	VBUS5V0_TYPEC	+5V	-
A10	TYPEC0RX2N	-	-
A11	TYPEC0RX2P	-	-
A12	GND	GND	-
B1	GND	GND	-
B2	TYPEC0TX2P	-	-
B3	TYPEC0TX2N	-	-
B4	VBUS5V0_TYPEC	+5V	-
B5	TYPEC0_CC2	-	-
B6	TYPEC0_OTGDP	-	-
B7	TYPEC0_OTGDM	-	-
B8	TYPEC0_AUXM	-	-
B9	VBUS5V0_TYPEC	+5V	-

B10	TYPEC0RX1N	-	-
B11	TYPEC0RX1P	-	-
B12	GND	GND	-

RJ45 (J6)

Pin number	Pin name	Voltage level	Notice
1	DA+	-	-
2	DA-	-	-
3	DB+	-	-
4	DC+	-	-
5	DC-	-	-
6	DB-	-	-
7	DD+	-	-
8	DD-	-	-

RJ45 (J7)

Pin number	Pin name	Voltage level	Notice
1	DA+	-	-
2	DA-	-	-
3	DB+	-	-
4	DC+	-	-
5	DC-	-	-
6	DB-	-	-
7	DD+	-	-
8	DD-	-	-

Power (J8)

Pin number	Pin name	Voltage level	Notice
1	DC-IN	12V	-
2	DC-IN	12V	-
3	GND	GND	-
4	GND	GND	-

GPIO1 (J9)

Pin number	Pin name	Voltage level	Notice
1	EXTIO_P0_3	3.3V	Extended IO from AW9523
2	MIPI_CAM4_PDN_L	1.8V	GPIO1_B0_u
3	EXTIO_P1_3	3.3V	Extended IO from AW9523
4	MIPI_CAM3_PDN_L	1.8V	GPIO1_A7_u
5	MIPI_CAM4_PWREN_H	1.8V	GPIO0_B1_d
6	MIPI_CAM3/4_RESET_L	1.8V	GPIO2_B6_d
7	MIPI_CAM3_PWREN_H	1.8V	GPIO1_B2_d
8	MIPI_CAM2_PDN_L	1.8V	GPIO1_A4_d
9	GND	GND	-
10	MIPI_CAM1_PDN_L	1.8V	GPIO1_A2_d

GPIO2 (J10)

Pin number	Pin name	Voltage level	Notice
1	VCC12V_DCIN	12V	+12V Input/Output
2	VCC12V_DCIN	12V	
3	VCC12V_DCIN	12V	
4	VCC12V_DCIN	12V	
5	GND	GND	-
6	GND	GND	-
7	VCC_5V0	5V	+5V Output (2A)
8	VCC_5V0	5V	
9	GND	GND	-
10	GND	GND	-
11	VCC3V3_EXT	3.3V	+3.3V Output (2A)
12	VCC3V3_EXT	3.3V	
13	VCC1V8_EXT	1.8V	+1.8V Output (0.2A)
14	VCC1V8_EXT	1.8V	
15	SARADC_VIN3_HP_HOOK	0~1.8V	ADC input
16	NC	-	Not Connected
17	GND	GND	-
18	GND	GND	-
19	CAN0_TX_3V3	3.3V	CAN0-Tx-M0/GPIO0_B7_d
20	CAN0_RX_3V3	3.3V	CAN0-Rx-M0/GPIO0_C0_d
21	NC	-	-
22	NC	-	-
23	UART6_TX_M2_3V3	3.3V	GPIO1_D0_d
24	UART6_RX_M2_3V3	3.3V	GPIO1_D1_d
25	UART4_TX_M0_3V3	3.3V	GPIO2_B5_u
26	UART4_RX_M0_3V3	3.3V	GPIO2_B4_u
27	UART9_TX_M2_3V3	3.3V	GPIO4_A3_d
28	UART9_RX_M2_3V3	3.3V	GPIO4_A4_d
29	I2C4_SCL_M0_3V3	3.3V	GPIO0_D0_d
30	I2C4_SDA_M0_3V3	3.3V	GPIO0_C7_d
31	TP_RST_L_3V3	3.3V	GPIO3_C1_d
32	TP_INT_L_3V3	3.3V	GPIO3_C0_d(In:3.3V/Out:1.8V)
33	GPIO3A6D_1V8	1.8V	GPIO3_A6_d
34	SPK_CTRL_H_3V3	3.3V	GPIO4_A0_d
35	MIPI_CAM1/2_RESET_L	1.8V	GPIO1_A3_d
36	EXTIO_P1_0	3.3V	Extended IO from AW9523
37	EXTIO_P1_1	3.3V	Extended IO from AW9523
38	EXTIO_P1_2	3.3V	Extended IO from AW9523
39	GND	GND	-

40	GND	GND	-
----	-----	-----	---

Micro-SIM (J11)

Pin number	Pin name	Voltage level	Notice
1	CD	SIM_VCC	SimCard insert detect - Low:SIM card plugged in; High: SIM card pulled out.
2	NC	-	-
3	NC	-	-
4	SIM-IO	SIM_VCC	Data of SIM Card
5	SIM-Clock	SIM_VCC	Clock of SIM Card
6	NC	-	-
7	SIM-Reset	SIM_VCC	Reset of SIM Card
8	GND	-	-
9	SIM-VCC	-	1.8V/3.3V Auto Switched

TF Card (J12)

Pin number	Pin name	Voltage level	Notice
1	Data2	VCCIO_SD	GPIO4_D2_u
2	Data3	VCCIO_SD	GPIO4_D3_u
3	CMD	VCCIO_SD	GPIO4_D4_u
4	VDD	VCCIO_SD	-
5	CLK	VCCIO_SD	GPIO4_D5_d
6	GND	GND	-
7	Data0	VCCIO_SD	GPIO4_D0_u
8	Data1	VCCIO_SD	GPIO4_D1_u
9	Card-Detect	1.8V	GPIO0_A4-u

USB3.0 (J13)

Pin number	Pin name	Voltage level	Notice
1	VBUS	+5V	5V/1A Output
2	D-	GND	USB 1.1/2.0 DP
3	D+	-	USB 1.1/2.0 DM
4	GND	GND	-
5	RX-	-	USB3.0 SSRX-
6	RX+	-	USB3.0 SSR+
7	GND	GND	-
8	TX-	-	USB3.0 SSTX-
9	TX+	-	USB3.0 SSTX+

USB3.0 (J14)

Pin number	Pin name	Voltage level	Notice
1	VBUS	+5V	5V/1A Output
2	D-	GND	USB 1.1/2.0 DP
3	D+	-	USB 1.1/2.0 DM
4	GND	GND	-

5	RX-	-	USB3.0 SSRX-
6	RX+	-	USB3.0 SSR+
7	GND	GND	-
8	TX-	-	USB3.0 SSTX-
9	TX+	-	USB3.0 SSTX+

USB3.0 (J15)

Pin number	Pin name	Voltage level	Notice
1	VBUS	+5V	5V/1A Output
2	D-	GND	USB 1.1/2.0 DP
3	D+	-	USB 1.1/2.0 DM
4	GND	GND	-
5	RX-	-	USB3.0 SSRX-
6	RX+	-	USB3.0 SSR+
7	GND	GND	-
8	TX-	-	USB3.0 SSTX-
9	TX+	-	USB3.0 SSTX+

Power LED (J16)

Pin number	Pin name	Voltage level	Notice
1	LED1+	-	Red LED for Power OK
2	LED1-	-	-
3	LED2+	-	Green LED for system status
4	LED2-	-	-

Work LED (J17)

Pin number	Pin name	Voltage level	Notice
1	LED1+	-	Green LED for 3G/4G Modue
2	LED1-	-	-
3	LED2+	-	Green LED for system status
4	LED2-	-	-

Debug&Key (J18)

Pin number	Pin name	Voltage level	Notice
1	CPU_DBG_TX	3.3V	1.5M bps Datarate/GPIO0_B5_d
2	CPU_DBG_RX	3.3V	1.5M bps Datarate/GPIO0_B6_d
3	VCC3V3_EXT	3.3V	3.3V/1A Output
4	GND	GND	-
5	NPU1_TX	3.3V	UART From PCIe Slot(J41)
6	NPU1_RX	3.3V	UART From PCIe Slot(J41)
7	NPU2_TX	3.3V	UART From PCIe Slot(J33)
8	NPU2_RX	3.3V	UART From PCIe Slot(J33)
9	GND	GND	-
10	GND	GND	-
11	PWR_KEY	+3.3V	Pulled up internally by 30K Ohm resistor

12	GND	GND	-
13	GND	-	-
14	BOOT_SARADC_IN0_IO	-	Pulled up internally. Pull Low to make system enter USB download mode
15	RST_KEY	-	Pulled up internally. Pull Low to reboot the entire system.
16	GND	GND	-
17	GND	GND	-
18	UPDATE_KEY	-	Key for system recovery or other function

Reset Key (J19)

Pin number	Pin name	Voltage level	Notice
1	RESETn	-	Push to Reset the system

Update (J20)

Pin number	Pin name	Voltage level	Notice
1	SARADC_VIN1	0~1.8V	Key for system recovery or other function

Reset for external key(J21)

Pin number	Pin name	Voltage level	Notice
1	RESETn	-	Push to Reset the system
2	GND	GND	-

Update for external key (J22)

Pin number	Pin name	Voltage level	Notice
1	SARADC_VIN1	0~1.8V	Key for system recovery or other function
2	GND	GND	-

LVDS (J23)

Pin number	Pin name	Voltage level	Notice
1	VCC_LVDS	3.3V/5V optional by J27	-
2	VCC_LVDS		-
3	VCC_LVDS		-
4	GND	GND	-
5	GND	GND	-
6	GND	GND	-
7	RX00M	-	-
8	RX00P	-	-
9	RX01M	-	-
10	RX01P	-	-
11	RX02M	-	-
12	RX02P	-	-
13	GND	GND	-

14	GND	GND	-
15	RXOCM	-	-
16	RXOCP	-	-
17	RXO3M	-	-
18	RXO3P	-	-
19	RXE0M	-	-
20	RXE0P	-	-
21	RXE1M	-	-
22	RXE1P	-	-
23	RXE2M	-	-
24	RXE2P	-	-
25	GND	GND	-
26	GND	GND	-
27	RXECM	-	-
28	RXECP	-	-
29	RXE3M	-	-
30	RXE3P	-	-
31	GND	-	-
32	GND	-	-
33	LVDS_BL_EN	1.8V	GPIO2_C1_d
34	LVDS_BL_PWM0	1.8V	GPIO4_C6_d
35	LVDS_IRQ	3.3V	Connected to GM8775
36	I2C_SDA_LVDS	1.8V	I2C2_SDA_M4/GPIO1_A0_d
37	LVDS_PWR_EN	1.8V	GPIO1_D6_u
38	I2C_SCL_LVDS	1.8V	I2C2_SCL_M4/GPIO1_A1_d
39	GND	-	-
40	NC	-	Not Connected

ADC/Audio (J24)

Pin number	Pin name	Voltage level	Notice
1	SARADC_VIN2	0 ~ 1.8V	ADC Input Channel 5
2	SARADC_VIN4	0 ~ 1.8V	ADC Input Channel 4
3	NC	-	-
4	NC	-	-
5	HP_GND	Analog GND	-
6	GND	GND	-
7	HPR_OUT	Analog	HeadPhone Right Channel Output
8	HPL_OUT	Analog	HeadPhone Left Channel Output
9	SPKN_OUT	Analog	Speaker Output N (3W @4 Ohm Load)
10	SPKP_OUT	Analog	Speaker Output P (3W @4 Ohm Load)

SPEAKER (J25)

Pin number	Pin name	Voltage level	Notice
1	SPK_OUT_R+	-	3W ClassD audio Output
2	SPK_OUT_R-	-	
3	SPK_OUT_L-	-	3W ClassD audio Output
4	SPK_OUT_L+	-	

LCM_BL (J26)

Pin number	Pin name	Voltage level	Notice
1	GND	GND	-
2	GND	GND	-
3	BL_ADJ	1.8V	GPIO4_C6_d
4	BL_EN	1.8V	GPIO2_C1_d
5	VCC12V_BL	12V	12V Output for BackLight
6	VCC12V_BL	12V	12V Output for BackLight

USB2.0 (J27)

Pin number	Pin name	Voltage level	Notice
1	+5V	+5V	5V/1A Output
2	D-	-	-
3	D+	-	-
4	GND	GND	-

RTC Battery (J28)

CR1220 lithium battery Socket 3V

MIPI-DPhy-Rx*2 (J29)

Pin number	Pin name	Voltage level	Notice
3,6,9,12,15,18,21,24,27,30	GND	GND	-
1	MIPI_DPHY0_RX_CLKP	-	-
2	MIPI_DPHY0_RX_CLKN	-	-
4	MIPI_DPHY0_RX_D0P	-	-
5	MIPI_DPHY0_RX_D0N	-	-
7	MIPI_DPHY0_RX_D1P	-	-
8	MIPI_DPHY0_RX_D1N	-	-
10	MIPI_DPHY0_RX_D2P	-	-
11	MIPI_DPHY0_RX_D2N	-	-
13	MIPI_DPHY0_RX_D3P	-	-
14	MIPI_DPHY0_RX_D3N	-	-
16	MIPI_DPHY1_RX_CLKP	-	-
17	MIPI_DPHY1_RX_CLKN	-	-
19	MIPI_DPHY1_RX_D0P	-	-
20	MIPI_DPHY1_RX_D0N	-	-
22	MIPI_DPHY1_RX_D1P	-	-
23	MIPI_DPHY1_RX_D1N	-	-
25	MIPI_DPHY1_RX_D2P	-	-

26	MIPI_DPHY1_RX_D2N	-	-
28	MIPI_DPHY1_RX_D3P	-	-
29	MIPI_DPHY1_RX_D3N	-	-

MIPI-CSI-B (J30)

Pin number	Pin name	Voltage level	Notice
1,4,7,10,13,16,19	GND	GND	-
2	MIPI_CAM2_RX_D0P	-	-
3	MIPI_CAM2_RX_D0N	-	-
5	MIPI_CAM2_RX_D1P	-	-
6	MIPI_CAM2_RX_D1N	-	-
8	MIPI_CAM2_RX_CLK0N	-	-
9	MIPI_CAM2_RX_CLK0P	-	-
11	MIPI_CAM2_RX_D2P	-	-
12	MIPI_CAM2_RX_D2N	-	-
14	MIPI_CAM2_RX_D3P	-	-
15	MIPI_CAM2_RX_D3N	-	-
17	MIPI_CAM2_RX_CLK1P	-	-
18	MIPI_CAM2_RX_CLK1N	-	-
20	MIPI_CAM2_CLK	1.8V	GPIO1_B7-u
21	CAMB_RST1	1.8V	GPIO2_B6-d
22	CAMB_PDN1_L	1.8V	GPIO1_A7-u
23	CAMB_RST2	1.8V	GPIO2_B6-d
24	CAMB_PDN2_L	1.8V	GPIO1_B0-u
25	I2C_SCL_CAM2	1.8V	I2C2_SCL_M4/GPIO1_A1-d
26	I2C_SDA_CAM2	1.8V	I2C2_SDA_M4/GPIO1_A0-d
27	VCC1V8_DOVDD_DVP0	1.8V	1.8V Output (300mA)
28	VDD1V2_DVDD_DVP0	1.2V	1.2V Output (300mA)
29	VCC2V8_DVP0	2.8V	2.8V Output (300mA)
30	VCC2V8_AVDD_DVP0	2.8V	2.8V Output (300mA)

Note: This MIPI can be used as a 4-Lane or 2*2Lane input.

MIPI-CSI-A (J31)

Pin number	Pin name	Voltage level	Notice
1,4,7,10,13,16,19	GND	GND	-
2	MIPI_CAM1_RX_D0P	-	-
3	MIPI_CAM1_RX_D0N	-	-
5	MIPI_CAM1_RX_D1P	-	-
6	MIPI_CAM1_RX_D1N	-	-
8	MIPI_CAM1_RX_CLK0N	-	-
9	MIPI_CAM1_RX_CLK0P	-	-
11	MIPI_CAM1_RX_D2P	-	-
12	MIPI_CAM1_RX_D2N	-	-

14	MIPI_CAM1_RX_D3P	-	-
15	MIPI_CAM1_RX_D3N	-	-
17	MIPI_CAM1_RX_CLK1P	-	-
18	MIPI_CAM1_RX_CLK1N	-	-
20	MIPI_CAM1_CLK	1.8V	GPIO1_B6-u
21	CAMA_RST1	1.8V	GPIO1_A3-d
22	CAMA_PDN1_L	1.8V	GPIO1_A2-d
23	CAMA_RST2	1.8V	GPIO1_A3-d
24	CAMA_PDN2_L	1.8V	GPIO1_A4-d
25	I2C_SCL_CAM1	1.8V	I2C3_SCL_M0/GPIO1_C1-z
26	I2C_SDA_CAM1	1.8V	I2C3_SDA_M0/GPIO1_C0-z
27	VCC1V8_DOVDD_DVP0	1.8V	1.8V Output (300mA)
28	VDD1V2_DVDD_DVP0	1.2V	1.2V Output (300mA)
29	VCC2V8_DVP0	2.8V	2.8V Output (300mA)
30	VCC2V8_AVDD_DVP0	2.8V	2.8V Output (300mA)

Note: This MIPI can be used as a 4-Lane or 2*2Lane input.

Fan Power(J32)

Pin number	Pin name	Voltage level	Notice
1	Fan Power out	+12V	+12V out for fan power
2	GND	GND	-

7.Application Scenarios



AI



Machine Vision



Industrial Control



Energy and Power



Smart Tablet



VR




Smart Logistics



New



Smart Commercial

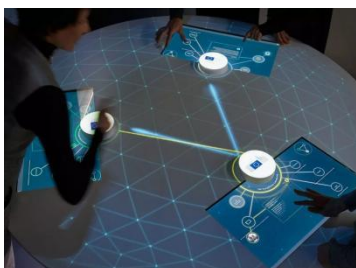

Object Recognition



Vehicle terminal



Security Surveillance

8. Ordering Model

Product Model	Status	CPU	DDR	eMMC	Operating Temperature
LZ16343200	ACTIVE	RK3588S	4GB	32GB	-10°C - 70°C
LZ16386400	ACTIVE	RK3588S	8GB	64GB	-10°C - 70°C
LZ1639A800	ACTIVE	RK3588S	16GB	128GB	-10°C - 70°C

*For customized non-standard orders, please contact us via email at sales@neardi.com.

9.About NearDi
















Shanghai NearDi Technology Co., Ltd., established in 2014, is a national-level high-tech enterprise, a strategic partner of Rockchip, and an authorized agent for Black Sesame Technologies. We focus on the research and development and production of enterprise-level open-source hardware platforms, offering customers core modules, industry-specific boards, development boards, touch panels, and industrial control hosts. Adhering to the core philosophy of technological innovation and professional service, leveraging NearDi Technology's technical strengths and industry experience, we assist our partners in achieving rapid mass production of their products.

Company Advantages

Software Design / Custom OS / Product ODM / Bulk Delivery

Products

Rockchip

System On Module				
 LCB3588/J	 LCB3568/J	 LCB3566	 LCB3399Pro	 LCB3399
Development Board				
 LKD3588/J	 LKD3568/J	 LKD3566	 LKD3399Pro	 LKD3399
Embedded Computer				
 LPB3588	 LPM3588	 LPC3588	 LPB3568	 LPB3399Pro






Black Sesame Technologies

 SOM-A-A1000	 SOM-π-A1000	 SOM-B-A1000	 SOM-A1000 开发者套件
--	--	--	--

Vehicle Terminal

 LPA3588	 LPA3568	 LPA3399Pro	 LPS3399Pro
--	--	---	--

WIFI Module

 FD7352S	 FD7352P	 FD7352M	 FD7155U	 FD7256S
--	--	--	--	--